



MODEL 1010 10-BIKE PARKING RACK Owner's Manual (Single-Sided)


Content:	Qty
57.8" x 30.9" 5-Bike Grid	2
End-piece bent tubes	2
58" steel base tube	2
Bottom connector bracket	1
Top connector bracket	1
M10-95mm grid top bolts & 16mm nuts	2
M10-60mm bottom bolts (no nuts)	4
M10-60mm connector bolts & 16mm nuts	6
Plastic end caps	6

ASSEMBLY INSTRUCTIONS:

This rack is specially designed with modular grids for easy packing and shipping. The grids and the 57.8" poles are connected using connector coupling as shown in the picture.

Note: You may need someone to assist you by holding the grids while connecting them to the side tubes.

1. Attach one 57.8" pole and one grid to right side tube. Repeat this for the second grid, pole, and left side tube. Note that 60mm bottom bolts for side tubes do not need any nuts. The side-tubes are pre-threaded.
2. Attach the two sides to the connector couplings in the middle.
3. Tighten the bolts and insert the plastic end plugs.

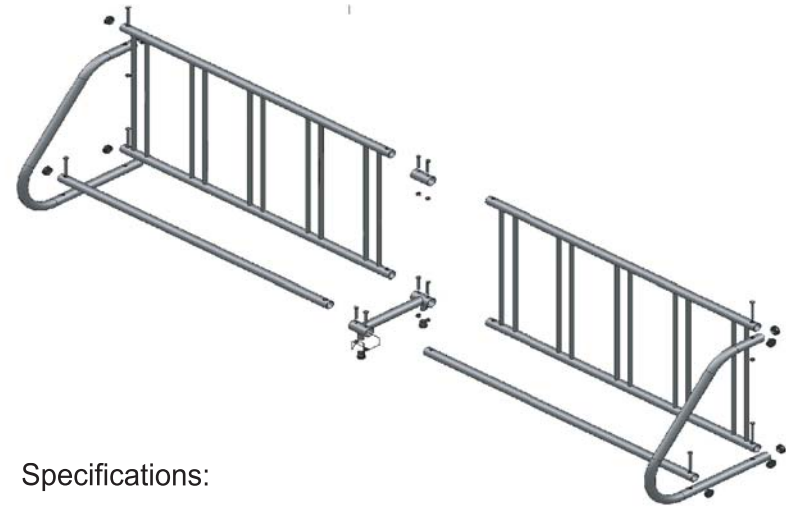

Specifications:

Heavy duty 16-gauge steel tubing
Fully welded and galvanized
Dimensions: 116" L x 26" W x 30.9" H
Capacity: 10 full-size bicycles (single side)
Shipping Weight: 71 Lbs
Packing: Cardboard box
Meets UPS/FEDEX ground shipping requirements

LIMITED WARRANTY

Husky bicycle parking racks are warranted to be free from defects in material and workmanship for a period of five years (5-years) from date of purchase. Proof of original retail purchase is required on all warranty claims.

This warranty does not cover normal wear and tear, damage or dents, exposure to corrosive chemicals, or misuse. This warranty is limited to replacement of all or parts of the bicycle rack as sole remedy and in no event Husky or HLF Distributing, Inc. shall be liable for any incidental or consequential damages, losses, or expenses.

Please contact Husky Bicycles at (800) 392-3337 if you have any questions.